

# Xpress™ CM100

## Contactless Reader Module

### Contactless Technology

The Xpress CM100 reads card data from a variety of contactless sources, including credit cards, key fobs, and NFC-enabled cell phones. It is designed for POS applications that accept contactless transactions, such as quick-service venues and self-service kiosks. Four LED indicators at the top of the module make it easy for cardholders to see that they have completed a successful card read operation.

### Easy to Integrate

The Xpress CM100 is designed to allow flexibility of integration of EMV 2.0.1 contactless card reading to different market segments. With its modular architecture, the reader can be mounted to kiosks, attached to terminals, or used as a countertop standalone device. It is also possible to integrate the module with other payment technologies, such as MagStripe readers. The Xpress CM100 is an optional attachment for the ID TECH Sign & Pay terminal.

### Versatility

The Xpress CM100 is perfect for a wide variety of applications, including quick service restaurants, ticket booths, parking garages, retail locations, public transportation, and gas stations. With support for Visa payWave, MasterCard PayPass, American Express ExpressPay, Discover Zip and MiFare and NFC technologies, the Xpress CM100 can be integrated into just about any application that accepts contactless technology.

### Features and Benefits:

- Reads data from contactless cards, key fobs, and cell phones
- Compact design: Small footprint is ideal for flexible integration
- Complies with EMV Contactless 2.0.1
- Clear identification of successful card reads with LED indicators
- Compatible with ID TECH Sign & Pay terminal
- Certified by
  - Visa payWave
  - MasterCard PayPass
  - American Express ExpressPay
  - Discover card Zip



**IDTECH®**  
Value through Innovation

# Xpress™ CM100 Specifications IDCA-I261

## Electrical

Power Requirements: +5 VDC  
Interfaces: USB-HID

## Environmental

Operating Temperature: -20°C to 70°C (-4°F to 158°F)  
Storage Temperature: -40°C to 80°C (-40°F to 176°F)  
Humidity: 10% to 95% non-condensing, dry storage


## Reliability

Conformance: ISO 14443 Type A & B  
Warranty: One year, parts and labor

## Mechanical

Dimensions(L)x(W)x(H): 2.36 inches (60mm) x 3.15 inches (80mm) x 0.51 inches (13mm)  
Weight: 1.92 oz. (4.78 oz. with cable)  
Indicators: Four LED lights and beeper  
Cable Length: 3 feet (0.91m)

Foot Print:

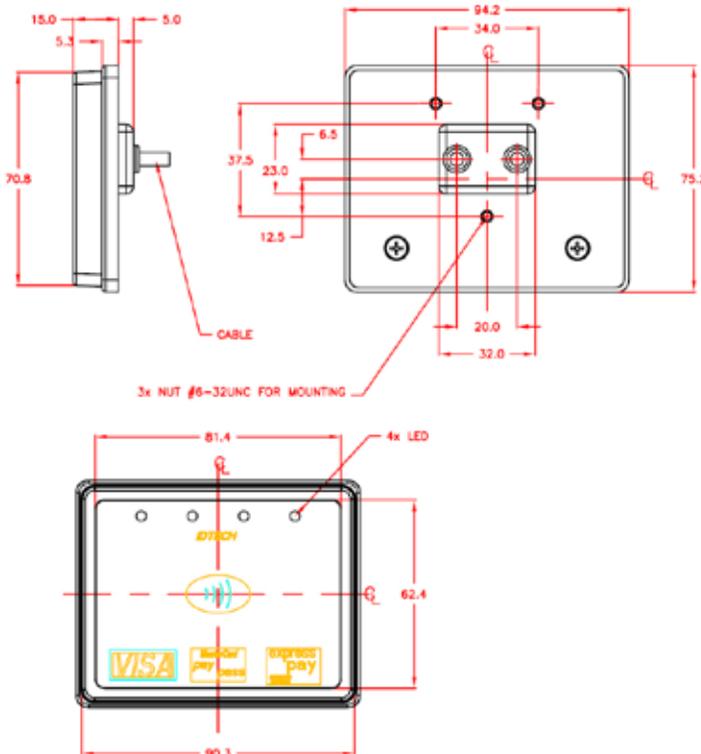

## IDTECH®

Value through Innovation

### Corporate Headquarters:

10721 Walker Street, Cypress, California 90630  
www.idtechproducts.com  
(714) 761-6368 sales@idtechproducts.com

### International Sales Office

#### Canada & South America:

+450 465 5261 (Canada) robertop@idtechproducts.com

### European Sales Offices:

+49(0) 8851 6159900 (Germany)  
emea@idtechproducts.com

ISO 9001 Certified